



User's Guide
Addendum
Publishing Finisher

© 2004 Ricoh Printing Systems America, Inc.
2635-A Park Center Drive
Simi Valley, CA 93065
November 2004
N900108B

© 2004 Ricoh Printing Systems America, Inc. All rights reserved.

No part of this document may be reproduced without the express permission of Ricoh Printing Systems America, Inc.

The material in this document is for informational purposes and is subject to change without notice. Ricoh Printing Systems America, Inc., assumes no responsibility for errors or omissions in this document. No liability is assumed for any damages resulting from the use of the information it contains.

TRADEMARK

Digital Document Publisher, DDP, DDP 184, and their associated logo marks are trademarks of Ricoh Printing Systems America, Inc. Ricoh and the Ricoh word mark are registered trademarks of Ricoh Company, Ltd. All rights reserved.

All other terms and product names may be trademarks or registered trademarks of their respective owners, and are hereby acknowledged.

NOTICE TO USER

In an effort to meet the demands of a rapidly changing technology, the manufacturer is continually developing new features and functions to meet your changing printing or printer needs. As a result, this manual may not exactly reflect future changes made to the product. Please be sure to consult all manual updates or addenda when using this product's documentation.

What This Document Contains

This document serves as an addendum to the DDP 184 Printer User's Guide. It contains information related to the optional Publishing Finisher including:

[Operator Control Panel \(OCP\)](#)

[Web Pages](#)

[OCP Display Messages \(Error Messages\)](#)

Operator Control Panel

Following are OCP menu structures and OCP screens related to the Publishing Finisher.

Information Menu Structure

Level 1	Level2	Level 3	Level 4	Level 5
Information	Finisher	Publishing	Inserter	
			Folder	
			Booklet Stacker	Normal/Full
			Trash Box	Normal/Full
			Rear Staple Cartridge	Normal/Empty
			Front Staple Cartridge	Normal/Empty


Printer Menu Structure

Level 1	Level 2	Level 3	Level 4	Level 5
Printer	Test Print	Finishing Test (Publishing)	Inserter 1	1, 2, 3, MBT, HCF
			Inserter 2	1, 2, 3, MBT, HCF
			Center Fold	1, 2, 3, MBT, HCF
			Saddle Stitch	1, 2, 3, MBT, HCF
			Trimming Unit	1, 2, 3, MBT, HCF

Finisher Menu

When you have the optional Publishing Finisher installed and you select the Finisher icon from the Main Menu, this screen is displayed. You use it to gain access to the Publishing Finisher options described below.

For detailed information on using the Publishing Finisher, refer to the *Publishing Finisher User's Guide*.

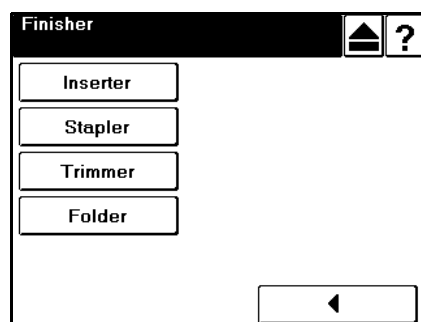

Inserter

Touch to display options for the Publishing Finisher Insert trays. You use this screen to select the paper size, type and weight for the Inserter trays.

Stapler

Touch to display the Publishing Finisher Stapler screen. You use this screen to modify the position of the staples in your booklets.

Trimmer

Touch to display the Publishing finisher Trimmer screen. You use this screen to specify the amount to be trimmed from the fore-edge of your booklets.

Folder

Touch to display the Publishing Finisher Folder screen. You use this screen to adjust the position of the fold in your booklets. Adjustments may be necessary based on sheet quality, direction and thickness.


Level 1	Level 2	Level 3	Level 4	Level 5	Level 6
Finisher Publishing	Inserter	Paper Size	Inserter 1/ Inserter 2	Folio SEF, Super B SEF, Custom size	Input for Custom Size
		Paper Weight	Inserter 1/ Inserter 2	60 - 199 g/m ² 33 - 110 lb. index 16-53 lb. bond	
	Stapler	Position			
	Trimmer	Position			
	Folder	Position			

Web Pages

The following are Web Pages related to the Publishing Finisher.

Status-Finisher

The Status-Finisher page displays the status of the finisher elements, such as the position of the cover, and the condition of the stacker and staple cartridges.

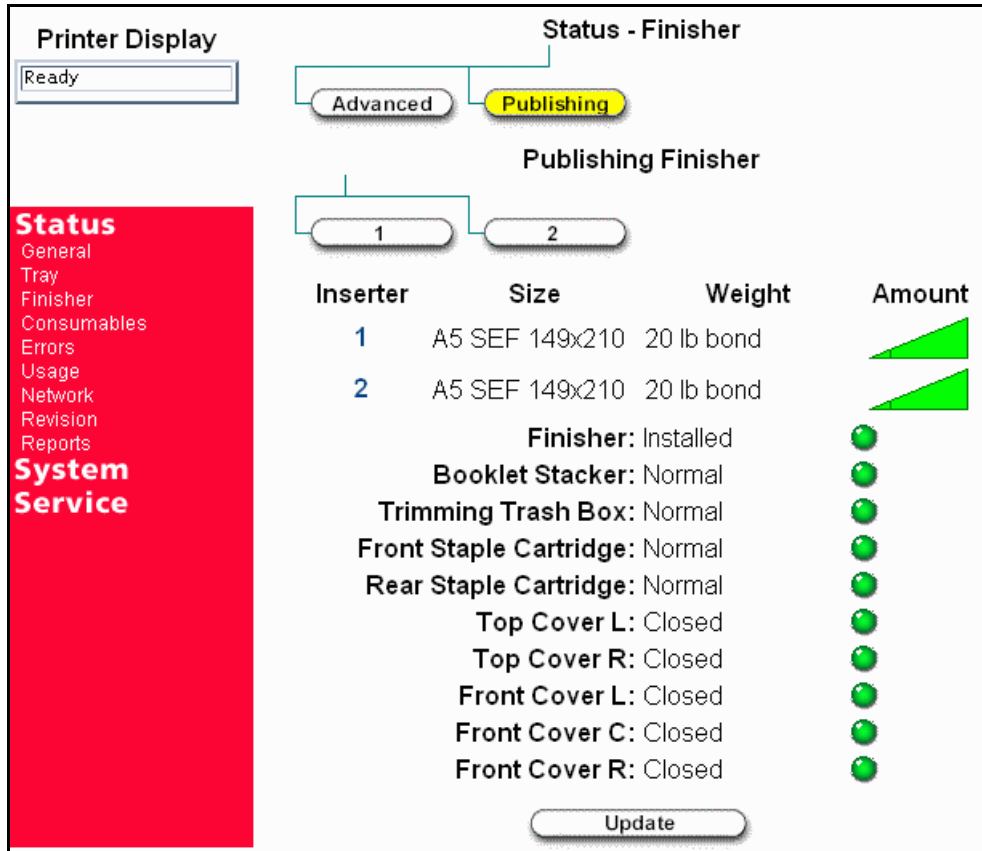

A colored button graphically indicates the condition of each element.

- Green indicates a normal condition.
- Yellow indicates a warning condition (e.g., consumable near end of life).
- Red indicates an obstacle to printing, such as an empty condition, consumable at end of life, paper jam, or door open.

This page refreshes automatically every 30 seconds. Optionally, you can click the Update button to refresh the display on demand.

System - Finisher - Inserter

The Inserter page provides information on the paper in the Publishing Finisher inserter trays, such as the paper size, type, and weight. From this page you can also enter custom paper size settings.

After making any desired changes, click Submit to update the setting.

Printer Display
Ready

System - Finisher
Advanced Publishing

Publishing Finisher
Booklet Inserter Stapler Trimmer Folder

Inserter 1

Paper Size	A5 SEF 149x210
Paper Weight	20 lb bond
Custom Size	inches 8.5 11

Submit

Status System
General
Printer
Finisher
Channel
Configuration
Accounting
Jobs
Dealer
Service

System - Finisher - Stapler

The Stapler page lets you modify the stapling position for booklets created with the Publishing Finisher. After making any desired changes, click Submit to update the setting.

The screenshot shows a web interface for configuring a printer's finisher. On the left is a red sidebar with a menu: **Status**, **System** (highlighted), **General**, **Printer**, **Finisher**, **Channel**, **Configuration**, **Accounting**, **Jobs**, **Dealer**, and **Service**. The main content area is titled **System - Finisher** and contains two tabs: **Advanced** and **Publishing** (which is selected). Below the tabs is the **Publishing Finisher** section, containing four buttons: **Booklet**, **Stapler** (selected), **Trimmer**, and **Folder**. The **Stapler - Publishing Finisher** section features a diagram of a document with a horizontal line and arrows indicating the stapling position. Below the diagram is a numeric input field set to **10.1** with a unit of **mm**. A note states, "Applies to Publishing Finisher only." At the bottom is a **Submit** button. In the top left corner, a **Printer Display** box shows the status as **Ready**.

System - Finisher - Trimmer

The Trimmer page lets you modify the trim position for booklets created with the Publishing Finisher. After making any desired changes, click Submit to update the setting.

The screenshot shows a web interface for configuring a printer's finisher. On the left is a red sidebar with a 'Status System' section containing links: General, Printer, Finisher, Channel, Configuration, Accounting, Jobs, and Dealer. Below this is a 'Service' section. The main content area is titled 'System - Finisher' and contains two tabs: 'Advanced' and 'Publishing', with 'Publishing' selected. Below these tabs is the 'Publishing Finisher' section, which includes four buttons: 'Booklet', 'Inserter', 'Stapler', and 'Trimmer'. The 'Trimmer' button is highlighted in yellow. Under the 'Trimmer' button is a diagram of a trimmer with a vertical line and an arrow pointing right. Below the diagram is a numeric input field set to '0.2' followed by 'mm'. At the bottom of the trimmer section is a 'Submit' button. In the top left corner of the main area, there is a 'Printer Display' box showing 'Ready'.

Printer Display
Ready

System - Finisher

Advanced Publishing

Publishing Finisher

Booklet Inserter Stapler Trimmer Folder

Trimmer

0.2 mm

Submit

System - Finisher - Folder

The Folder page lets you modify the folding position for booklets created with the Publishing Finisher. After making any desired changes, click Submit to update the setting.

The screenshot shows a web interface for configuring a printer's finisher. On the left is a red sidebar with a menu: **Status**, **System** (with sub-items: General, Printer, Finisher, Channel, Configuration, Accounting, Jobs, Dealer), and **Service**. The main content area is titled **System - Finisher** and contains two tabs: **Advanced** and **Publishing** (which is selected). Below the tabs is the **Publishing Finisher** section, featuring five buttons: **Booklet**, **Inserter**, **Stapler**, **Trimmer**, and **Folder** (which is selected). The **Folder** section displays a diagram of a document being folded, a numeric input field showing **10.2** mm, and a **Submit** button. In the top-left corner, a **Printer Display** box shows the status **Ready**.

OCP Display Messages

The following table lists the Publishing Finisher-related messages in alphabetical order. Each message is explained and a corrective action is given when applicable.

Message	Description	Corrective Action
Call for Service ECxx or other text	Any "Call for Service" message requires a service call for problem resolution Line 2 is the error code.	Contact your authorized Service Technician and provide the error code displayed on the OCP.
Paper in Connecting Unit Remove PaperE073	Paper jam in connecting unit of the Publishing Finisher.	Remove the jammed paper.
Paper in PF Entrance Remove Paper E074	Paper jam on IS path 21.	Remove the jammed paper.
Paper in PF Exit Remove Paper E079	Paper jam on IS path 26.	Remove the jammed paper.
Paper in PF Folder Remove Paper E077	Paper jam on IS path 24.	Remove the jammed paper.
Paper in PF Puncher Remove Paper E07A	Paper jam on IS path 27.	Remove the jammed paper.
Paper in PF Stapler Remove Paper E075	Paper jam on IS path 22.	Remove the jammed paper.
Paper in PF Stapler Remove Paper E076	Paper jam on IS path 23.	Remove the jammed paper.
Paper in PF Trimmer Remove Paper E078	Paper jam on IS path 25.	Remove the jammed paper.
Paper in Sheet Inserter 1 Remove Paper	Paper jam in insert tray 1.	Remove the jammed paper.
Paper in Sheet Inserter 2 Remove Paper	Paper jam in insert tray 2.	Remove the jammed paper.
Paper Jam Connecting Unit Remove PaperE1EA	The paper did not get to the connecting unit of the Publishing Finisher.	Remove the jammed paper.
Paper Jam PF Entrance Remove PaperE1EB	Paper jam before Publishing Finisher entrance.	Remove the jammed paper.
Paper Jam PF Entrance Remove PaperE1F3	Paper jam in connecting unit of the Publishing Finisher.	Remove the jammed paper.
Paper Jam PF Exit Remove PaperE1F0	Paper jam before Publishing Finisher exit.	Remove the jammed paper.
Paper Jam PF Exit Remove PaperE1F8	Paper jam in Publishing Finisher exit.	Remove the jammed paper.
Paper Jam PF Folder Remove PaperE1EE	Paper jam before the folding unit of the Publishing Finisher.	Remove the jammed paper.
Paper Jam PF Folder Remove PaperE1F6	Paper jam in the folding unit of the Publishing Finisher.	Remove the jammed paper.
Paper Jam PF Puncher Remove PaperE1F1	Paper jam before punching unit of the Publishing Finisher.	Remove the jammed paper.
Paper Jam PF Puncher Remove PaperE1F9	Paper jam in punching unit of the Publishing Finisher.	Remove the jammed paper.
Paper Jam PF Stapler Remove PaperE1EC	Paper jam before stapling unit of the Publishing Finisher.	Remove the jammed paper.
Paper Jam PF Stapler Remove PaperE1F4	Paper jam in stapling unit of the Publishing Finisher.	Remove the jammed paper.
Paper Jam PF Trimmer Remove PaperE1EF	Paper jam before trimming unit of the Publishing Finisher.	Remove the jammed paper.
Paper Jam PF Trimmer Remove PaperE1F7	Paper jam in trimming unit of the Publishing Finisher.	Remove the jammed paper.
Paper Jam Sheet Inserter 1 Remove PaperE1E0	Paper jam from insert tray 1.	Remove the jammed paper.

Message	Description	Corrective Action
Paper Jam Sheet Inserter 1 Remove PaperE1E1	Paper jam from insert tray 1.	Remove the jammed paper.
Paper Jam Sheet Inserter 1 Remove PaperE1E2	Paper jam from insert tray 1.	Remove the jammed paper.
Paper Jam Sheet Inserter 2 Remove PaperE1E5	Paper jam from insert tray 2.	Remove the jammed paper.
Paper Jam Sheet Inserter 2 Remove PaperE1E6	Paper jam from insert tray 2.	Remove the jammed paper.
Paper Jam Sheet Inserter 2 Remove PaperE1E7	Paper jam from insert tray 2.	Remove the jammed paper.
Paper Out Sheet Inserter 1 Load xxxE006	Sheet inserter 1 is out of paper. xxx is the paper size.	Load the requested paper in sheet inserter 1 of the Publishing Finisher.
Paper Out Sheet Inserter 2 Load xxxE007	Sheet inserter 2 is out of paper. xxx is the paper size.	Load the requested paper in sheet inserter 2 of the Publishing Finisher.
PF Front Cover C Open Close CoverE032	The specified Publishing Finisher cover is open.	Close the cover.
PF Front Cover L Open Close CoverE031	The specified Publishing Finisher cover is open.	Close the cover.
PF Front Cover R Open Close CoverE030	The specified Publishing Finisher cover is open.	Close the cover.
PF Top Cover L Open Close CoverE033	The specified Publishing Finisher cover is open.	Close the cover.
PF Top Cover R Open Close CoverE034	The specified Publishing Finisher cover is open.	Close the cover.
Sheet Inserter 1 Open Close TrayE025	Self-explanatory.	Close the tray.
Sheet Inserter 2 Open Close TrayE026	Self-explanatory.	Close the tray.
Trimming Trash Box Full Empty BoxE028	The trimming trash box of the Publishing Finisher is full.	Empty the box.
Trimming Trash Box Not Set Check Box	The trimming trash box of the Publishing Finisher is not seated properly.	Reseat the box.